




BEARING CORP. LTD.

INA PASE50-N bearing units

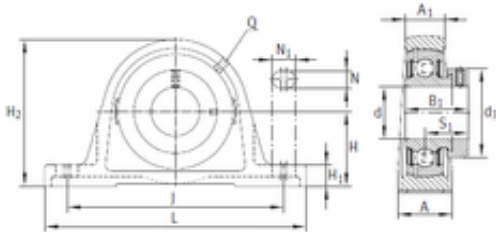

PASE50-N Bearing 2D drawings and 3D CAD models

Bearing No. PASE50-N

| | |
|-------------------------------|-----------------------|
| Bore Diameter | 50 mm |
| d | 50 mm |
| S1 | 32,8 mm |
| Thread (Q) | Rp1/8 |
| d3 | 69 mm |
| A | 54 mm |
| A1 | 34 mm |
| B1 | 43,8 mm |
| H | 57,2 mm |
| H1 | 21,5 mm |
| H2 | 115 mm |
| J | 158 mm |
| L | 200 mm |
| N | 18 mm |
| N1 | 23 mm |
| Weight | 2,59 Kg |
| Basic dynamic load rating (C) | 35 kN |
| Category | Pillow Block Bearings |
| Inventory | 0.0 |
| Manufacturer Name | SCHAEFFLER GROUP |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 2.958 |
| EAN | 4012802838398 |
| Product Group | M06110 |
| Number of Mounting Holes | 2 |
| Mounting Method | Eccentric Collar |



BEARING CORP. LTD.

| | |
|---------------------------------|--|
| Housing Style | 2 Bolt Pillow Block |
| Rolling Element | Ball Bearing |
| Housing Material | Cast Iron |
| Expansion / Non-expansion | Non-expansion |
| Relubricatable | Yes |
| Insert Part Number | GRAE50NPPB |
| Seals | Double Lip Contact |
| Housing Configuration | 1 Piece Solid |
| Inch - Metric | Metric |
| Other Features | Single Row Spherical Standard Shaft Height With Set Screw |
| Long Description | 2 Bolt Pillow Block; 50MM Bore; 57.2MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 151.5MM Minimum Bolt Spacing; 163.5MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Lip Co |
| Category | Pillow Block |
| UNSPSC | 31171511 |
| Harmonized Tariff Code | 8483.20.40.40 |
| Noun | Bearing |
| Keyword String | Pillow Block |
| Manufacturer URL | http://www.ina.com |
| Manufacturer Item Number | PASE50N |
| Weight / LBS | 7.056 |
| Base to Center Height | 2.252 Inch 57.2 Millimeter |
| Bolt Spacing Maximum | 6.437 Inch 163.5Millimeter |
| Actual Bolt Center to Center | 0 Inch 0Millimeter |
| Length Thru Bore | 1.72 Inch 43.7 Millimeter |
| Bore | 1.969 Inch 50 Millimeter |
| | |



BEARING CORP. LTD.

| | |
|-------------------------------|-------------------------------|
| Nominal Bolt Center to Center | 6.3 Inch 160 Millimeter |
| Bolt Spacing Minimum | 5.965 Inch 151.5 Millimeter |