




BEARING CORP. LTD.

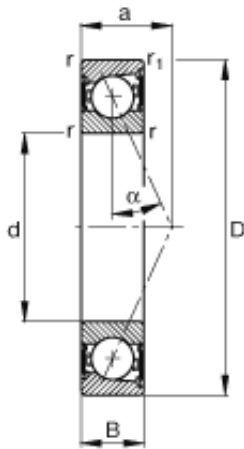

B7203-E-2RSD-T-P4S FAG precision ball bearings

Bearing No. B7203-E-2RSD-T-P4S

| | |
|----------------------|---|
| Size | 17x40x12 mm |
| Bore Diameter | 17 mm |
| Outer Diameter | 40 mm |
| Width | 12 mm |
| d | 17 mm |
| D | 40 mm |
| B | 12 mm |
| a | 13 mm |
| D_a | 34,5 mm / Tolerance: H12 |
| d_a | 22,5 mm / Tolerance: h12 |
| $r_{1 \text{ min}}$ | 0,6 mm |
| $r_{a \text{ max}}$ | 0,6 mm |
| $r_{a1 \text{ max}}$ | 0,6 mm |
| r_{min} | 0,6 mm |
| | 25 ° / Angle |
| m | 0,065 kg / Weight |
| C_r | 12400 N / Dynamic load rating (radial) |
| C_{0r} | 5600 N / Static load rating (radial) |
| $n_{G \text{ Fett}}$ | 36000 1/min / Limiting speed for grease lubrication |

B7203-E-2RSD-T-P4S Bearing 2D drawings and 3D CAD models