




BEARING CORP. LTD.

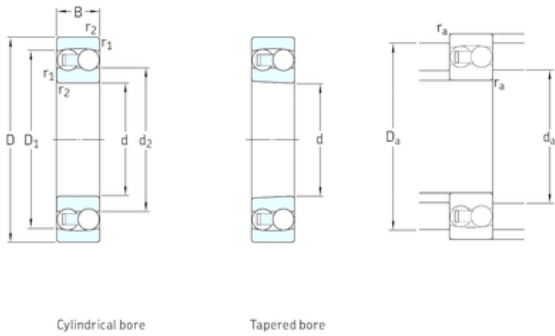

Cylindrical bore

Tapered bore

15 mm x 35 mm x 11 mm SKF 1202ETN9 self aligning ball bearings

Bearing No. 1202ETN9

1202ETN9 Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|-------------|
| Size | 15x35x11 mm |
| Bore Diameter | 15 mm |
| Outer Diameter | 35 mm |
| Width | 11 mm |
| d | 15 mm |
| D | 35 mm |
| B | 11 mm |
| C | 11 mm |
| d2 | 21,2 mm |
| r1 min. | 0,6 mm |
| r2 min. | 0,6 mm |
| D1 | 29,6 mm |
| da min. | 19,2 mm |
| Da max. | 30,8 mm |
| ra max. | 0,6 mm |
| Weight | 0,049 Kg |
| Basic dynamic load rating (C) | 7,41 kN |
| Basic static load rating (C0) | 1,76 kN |
| Fatigue load limit (Pu) | 0,09 |
| Reference speed | 45000 r/min |
| Limiting speed | 28000 r/min |
| Calculation factor (e) | 0,33 |
| Calculation factor (kr) | 0,04 |
| Calculation factor (Y0) | 2 |
| Calculation factor (Y1) | 1,9 |



BEARING CORP. LTD.