




BEARING CORP. LTD.

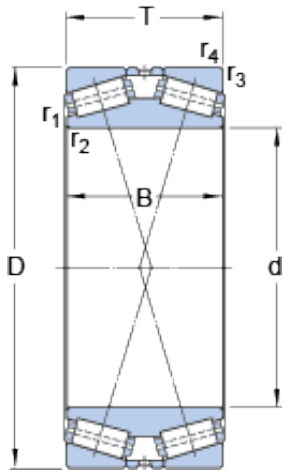

650 mm x 1030 mm x 270 mm SKF BT2B
328306/HA4 tapered roller bearings

Bearing No. BT2B 328306/HA4

BT2B 328306/HA4 Bearing 2D drawings and 3D CAD models

Size	1030x650x270 mm
Bore Diameter	1030 mm
Outer Diameter	650 mm
Width	270 mm
d	650 mm
D	1030 mm
T	270 mm
B	270 mm
$r_{1,2}$ - min.	15 mm
$r_{3,4}$ - min.	10 mm
Basic dynamic load rating - C	8800 kN
Basic static load rating - C_0	18300 kN
Fatigue load limit - P_u	1250 kN
Comparative radial load rating - C_F	2200 kN
Comparative axial load rating - C_{Fa}	679 kN
Thrust factor - K	1.84
Calculation factor - e	0.31
Calculation factor - Y_1	2.2
Calculation factor - Y_2	3.3
Calculation factor - Y_0	2.2
Mass bearing	900 kg
Design variant/feature	TDI.1/Y2



BEARING CORP. LTD.

d_1	747 mm
D_1	904 mm
$r_{1,2}$ min.	15 mm
$r_{3,4}$ min.	10 mm
Basic dynamic load rating C	8800 kN
Basic static load rating C_0	18300 kN
Fatigue load limit P_u	1250 kN
Calculation factor e	0.31
Calculation factor Y_1	2.2
Calculation factor Y_2	3.3
Calculation factor Y_0	2.2
Comparative radial load rating C_F	2200 kN
Comparative axial load rating C_{Fa}	679 kN
Thrust factor K	1.84